


# TOROTEC 5W-40 DX

Product Code: PCM017 | Revision: 20241002



Fully synthetic & mid SAPS automotive engine oil, ACEA C3.

## Available Pack Sizes

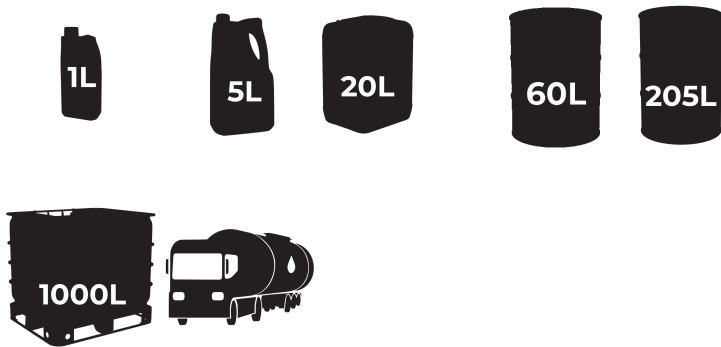

## Applications

A fully synthetic and mid SAPS engine oil formulated for use with petrol and diesel engines, particularly developed for BMW, GM, Mercedes-Benz and VW vehicles with exhaust after-treatment devices and Pumpe Düse (PD) diesel injection systems. Our specialist Adaptive Molecular Technology maintains engine power, maximises efficiency and improves reliability, ensuring optimum performance in all driving conditions.

## Recommended by Aztec Oils as suitable for the following applications

ACEA C3  
API SN/CF  
BMW LL-04  
Fiat 9.55535-S2  
Ford WSS-M2C917-A  
GM dexos2™  
Mercedes-Benz 229.51/229.31  
Porsche C40  
VW 505.01 (VW Pumpe Düse, PD engines)

## Benefits

- Advanced anti-wear technology helps to protect engine components.
- Engineered to have good oxidation resistance and superb thermal stability.
- Excellent high and low temperature performance.
- High standards of engine cleanliness.
- Maintains performance over extended drain intervals.
- Provides engine protection under high performance demands.
- Suitable for engines fitted with Pumpe Düse (PD) fuel injection systems.

## Typical Test Data

Density @ 15°C (kg/m <sup>3</sup> )	ASTM D4052	0.847
Flash Point (°C)	ASTM D92	230
Kinematic Viscosity @ 40°C (mm <sup>2</sup> /s)	ASTM D445	92
Kinematic Viscosity @ 100°C (mm <sup>2</sup> /s)	ASTM D445	14.2
Pour Point (°C)	ASTM D97	-42
Total Base Number (mg KOH/g)	ASTM D2896	8.5
Viscosity Index	ASTM D2207	159

The typical test data provided is taken from average values, there will be some variability in production and therefore do not constitute a specification.

## Health, Safety & Recommendations

- A Safety Data Sheet is available for consultation at [www.aztecoils.co.uk](http://www.aztecoils.co.uk).
- Before using this product, the vehicles maintenance guide should be checked and oil changes must be carried out in accordance with the manufacturers' recommendations.
- Packaging should not be left exposed to elements and drums should be laid horizontally to prevent contamination.
- This product should not be stored at temperatures over 60°C, kept out of direct sunlight, protected from frost and fluctuations in temperature.
- When disposing of the product after use, please protect the environment and comply with local regulations.