


TOROTEC 5W-30 FLR

Product Code: PCM020 | **Revision:** 20230428



Fully synthetic & low SAPS automotive engine oil, ACEA C1.

Available Pack Sizes

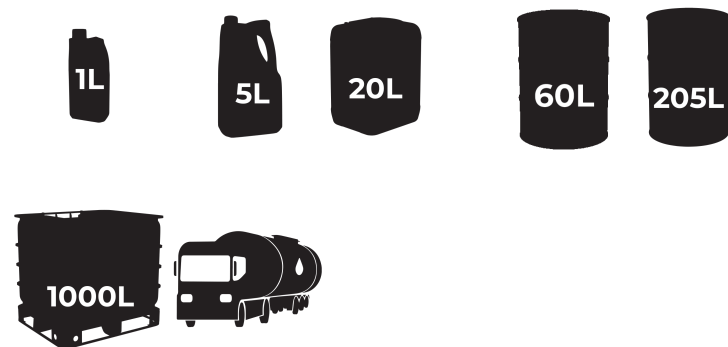

Applications

A fully synthetic and low SAPS engine oil formulated for use with petrol and diesel engines, particularly for Ford, Jaguar & Land Rover vehicles fitted with diesel particulate filters (DPF). Our specialist Adaptive Molecular Technology maintains power, optimises efficiency and improves reliability whilst supporting exhaust after-treatment devices throughout the vehicle's lifecycle in all driving conditions.

Recommended by Aztec Oils as suitable for the following applications

ACEA C1
Ford WSS-M2C934-B
Jaguar Land Rover STJLR.03.5005

Benefits

- Advanced anti-wear technology helps to protect engine components.
- Engineered to have good oxidation resistance and thermal stability.
- Excellent high and low temperature performance.
- High standards of engine cleanliness.
- Increased fuel efficiency.
- Maintains performance over extended drain intervals.

Typical Test Data

Density @ 15°C (kg/m ³)	ASTM D4052	0.845
Flash Point (°C)	ASTM D92	230
Kinematic Viscosity @ 40°C (mm ² /s)	ASTM D445	53.5
Kinematic Viscosity @ 100°C (mm ² /s)	ASTM D445	9.85
Pour Point (°C)	ASTM D97	-43
Total Base Number (mg KOH/g)	ASTM D2896	5.8
Viscosity Index	ASTM D2207	173

The typical test data provided is taken from average values, there will be some variability in production and therefore do not constitute a specification.

Health, Safety & Recommendations

In line with our policy of continued improvement, Aztec Oils reserve the right to change specifications and availability without prior notice. This product, used according to our recommendations and for its designed application, does not represent any particular risk. The information present in this technical data sheet is indicative of the product and is given in good faith, but should not form part of any specification.

Health, Safety & Recommendations

- A Safety Data Sheet is available for consultation at www.aztecoils.co.uk.
- Before using this product, the vehicles maintenance guide should be checked and oil changes must be carried out in accordance with the manufacturers' recommendations.
- Packaging should not be left exposed to elements and drums should be laid horizontally to prevent contamination.
- This product should not be stored at temperatures over 60°C, kept out of direct sunlight, protected from frost and fluctuations in temperature.
- When disposing of the product after use, please protect the environment and comply with local regulations.
- Note: As of circa 2016/2017, JLR no longer recommend Ford WSS-M2C934-B as a top-up, instead recommend STJLR.03.5005 or to use ACEA C2 if the latter is not available.

In line with our policy of continued improvement, Aztec Oils reserve the right to change specifications and availability without prior notice. This product, used according to our recommendations and for its designed application, does not represent any particular risk. The information present in this technical data sheet is indicative of the product and is given in good faith, but should not form part of any specification.